




HI-LITE MFG. CO., INC

13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211

Mounting Instructions for Double Chain-hung Fixture

1. Disconnect power at main electrical box before installing fixture.
2. Ascertain length of chain required and run fixture wires through hole in bottom of fixture loop, along and interwoven with chain links, through hole in canopy loop and around mounting strap.
3. Using wire nuts, connect white fixture wire to white outlet wire, black fixture wire to black outlet wire and green fixture wire to ground.
4. Tuck connected wiring into junction box and set mounting strap at approximate distance from junction box.
5. Screw nipple into mounting strap 5 turns, pass canopy over over end of nipple and screw ball onto end of nipple.
6. Pull slack from wiring along chain, and tuck into junction box then attach mounting strap to junction box using junction box screws provided.

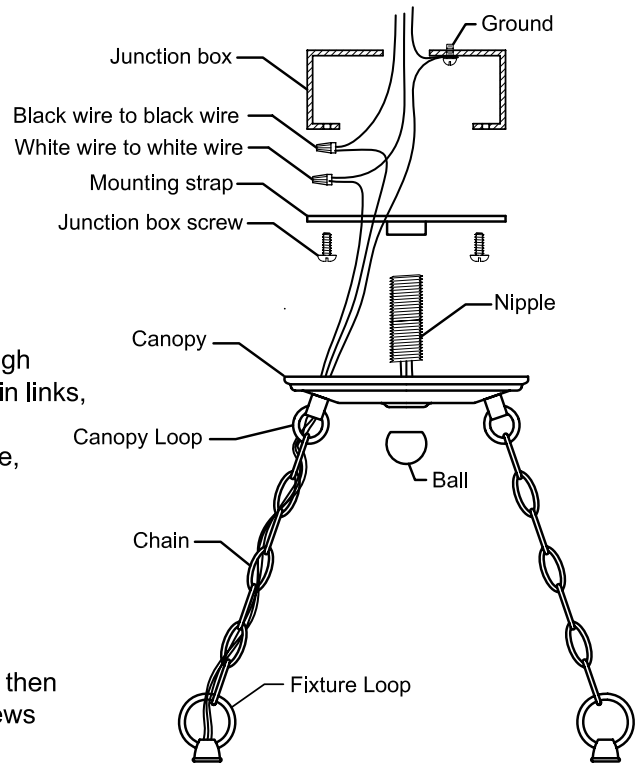

HI-LITE MFG. CO., INC

13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211

Mounting Instructions for Double Chain-hung Fixture

1. Disconnect power at main electrical box before installing fixture.
2. Ascertain length of chain required and run fixture wires through hole in bottom of fixture loop, along and interwoven with chain links, through hole in canopy loop and around mounting strap.
3. Using wire nuts, connect white fixture wire to white outlet wire, black fixture wire to black outlet wire and green fixture wire to ground.
4. Tuck connected wiring into junction box and set mounting strap at approximate distance from junction box.
5. Screw nipple into mounting strap 5 turns, pass canopy over over end of nipple and screw ball onto end of nipple.
6. Pull slack from wiring along chain, and tuck into junction box then attach mounting strap to junction box using junction box screws provided.

